

# HT5000UV SPECIFICATIONS



<b>Model</b>	<b>HT5000UV</b>	
<b>Printhead</b>	Kyocera KJ4A	
<b>Quantity of printheads</b>	8-10 pcs(Double rows)	
<b>Resolution</b>	726*2400dpi	
<b>Print speed</b>	<b>Draft</b>	192m/h
	<b>Production</b>	140m/h
	<b>Quality</b>	108m/h
<b>Max print width</b>	5.0m	
<b>Max media thickness</b>	2mm	
<b>Media type</b>	Roll materials	
<b>Ink</b>	Flexible UV ink	
<b>Ink color</b>	C、 M、 Y、 K (W as optional)	
<b>Machine size(L*W*H)</b>	8.88*2.03*2.02M	
<b>Machine net weight</b>	6300KG	
<b>Machine gross weight</b>	8170KG	
<b>Power consumption</b>	11.1KW(25A)	
<b>Power supply</b>	400VAC. 50Hz 3P/N/PE	
<b>RIP support</b>	Caldera	
<b>UV Curing</b>	LED	
<b>Interface</b>	High Speed PCIE	
<b>Environment</b>	Seperated workroom in good cleaning and ventilated condition, avoid direct sunlight Temperature: 18° C – 30° C(64°F-86°F) Constant Humidity: 30%-70%	



## HT5000UV

**Create value for customers; be a world-leading manufacturer of smart digital printing machines.**

- Diversified product configuration and application solution can match the different demand in advertising, decorating and other industries.
- Reliable stability combines the outstanding printing quality and speed performance.
- Top-level R&D team ensures prompt optimization and upgrade for new products and keep advanced technology in digital printing field.
- Strong worldwide after-sales service team quickly shoots your problem.
- High cost-value product brings you more business.

**HandTOP** Shenzhen HANDTOP Tech Co.,Ltd  
 Add:The Third Factory, NO.322 Yuanhu Road, Longgang District Shenzhen China.  
 Tel: 0755-2796 0460 Fax: 0755-2321 7841  
 E-mail: info-handtop@hanglorygroup.com  
 Http://www.handtopuv.com




HT5000UV Roll to Roll Printer

5m width MEDIA AREA




- 9 Multiple air cylinder supporter pinch roller  
Pinch roller with 8 air cylinder supporter which allow divided adjustment to ensure media transportation.
- 10 Water-cooling printing platform with adjustable suction zone  
Suitable for heat sensitive medias, make sure the media won't get distorted during the printing process and get better performance.
- 11 Auto height detection system, range of 0-30mm  
Automatically detects the height of media up to 30mm thickness and calibrates printhead distance for variable dot placement.
- 12 Water-cooling LED lamp  
Good curing performance with lower operating temperature and environment-friendly water-cooling LED system.
- 13 Top printing speed: up to 192m<sup>2</sup>/hr  
Being engineered for high-quality printing and outputs up to 192m<sup>2</sup>/hr with full blood capacity.
- 14 High-precision imported reducer  
With High-precision reducer at Y axis to increase the stepping accuracy for better high-end printing quality.
- 15 Automatic solenoid valve control of ink system  
The ink valve system is opened and closed automatically by solenoid valve control.

- 1 Auto media width detection system  
Automatically detects the width of media, flexible to print different size of media.
- 2 Static suppression(optional)  
Optional static suppression kit that eliminates static on the substrate.
- 3 Automatic negative pressure system  
Using PCB board to control negative pressure, set the negative pressure data from software.
- 4 Linear motor and metal raster  
High-tech linear motor gives more stable carriage movement, metal raster ensures the high precision in X direction movement.
- 5 Kyocera print heads(one head with 2 colors)  
Variable dots, true grey-scale imaging 4, 6 and 10pl
- 6 On board control module  
Rich functions, self-developed software, independent control module, efficient and convenient.
- 7 Function for mesh printing  
Special design with mesh kit, optional for the customers to print mesh material.
- 8 Double rollers feeding system  
Efficient and convenient system for loading the media.

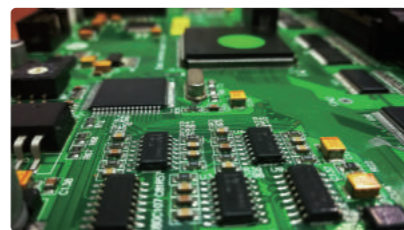

Self-developed, customized driver and PCB board

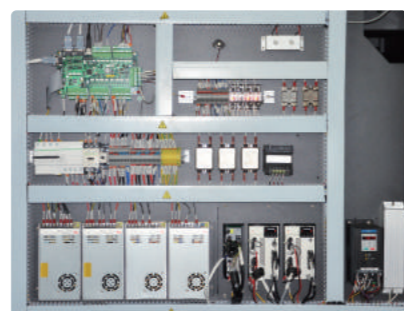

Industrialized wiring make it more artistic

Kyocera KJ4A Printhead

Nozzle quality : 2656  
Physical Resolution : 2\*300dpi  
Pico-litter : Variable 4-6-10pl  
Max Operating Frequency : 30Khz  
Effective Print Width : 112.35mm

